


Speed Display GR33L

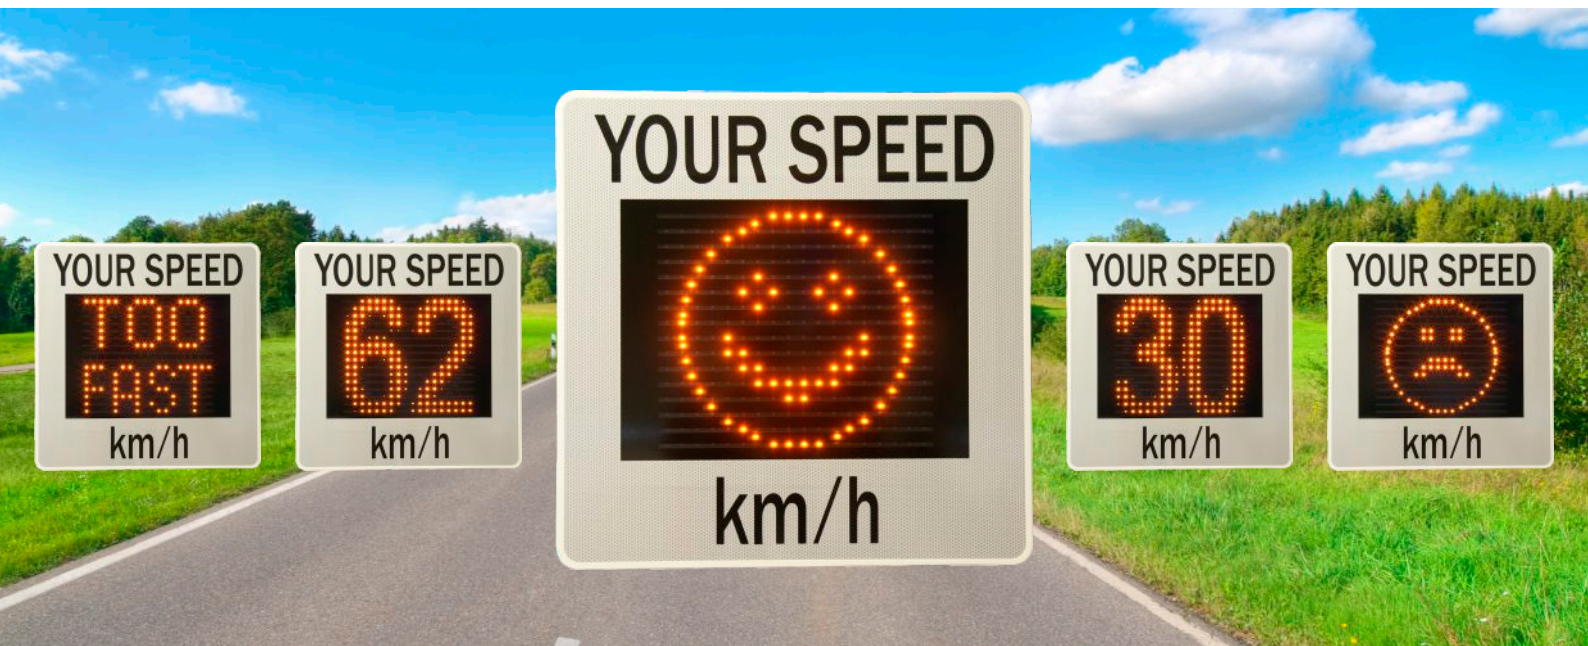

SPEED DISPLAYS TRAFFIC DETECTION

Radar. Detection. Software.

Features

- Dot matrix display
- Displays speed and pictures
- Flashes if speed threshold is exceeded
- Individual bitmaps can be uploaded such as text messages, smiling/frowning faces, speed limits, logos or any other symbols
- Adjustable minimum and maximum speed threshold
- Time controlled activation
- Automatic brightness regulation
- High contrast due to unique display construction
- Robust Lexan front window with anti-glare coating
- Bluetooth for display configuration
- Measurement of the supply voltage
- Deep discharge protection for batteries
- Low weight - only 4 kg!
- Easy one man installation
- User friendly control software for Android and Windows
- Unique value for money**

Highlights

It is a fact that radar-driven speed displays slow down traffic permanently.

This positive effect can be attributed to the display's ability to alert drivers with responsive messages wherever the device is deployed (school zones, Kindergarten, zebra crossings or on busy roads in residential areas).

The GR33L is a dot-matrix display that is able to show speeds driven as well as individual bitmaps which is an additional benefit to common speed displays.

Besides, the GR33L offers speed and time triggered bitmaps (such as smileys) and short text messages. So the unit is able to show different pictures during school time and the rest of the day.

All these features are put into a compact and extremely smart enclosure.



Android is a trademark of Google Inc., Windows is a trademark of Microsoft Inc.
Bluetooth is a trademark of Bluetooth SIG

SIERZEGA
detects traffic!
www.sierzega.com

Electrical Data

Input Voltage	12V
Power Consumption:	Low Power Design!
Standby (Radar on, LEDs off)	< 0,1W (!)
Display Active (speed value)	< 1W
Peak (all LEDs active)	4W

Radar sensor

Operating Frequency	K-Band (24 GHz)
Transmitting Power	5 mW
Certification	FCC, IC, CE approved
Operating Speed	2 ... 199 km/h or 2 .. 150 mph
Detection Range	min. 100 m, typ. 200m Truck typ. 300 m
Accuracy	± 3 %

LEDs

Brand	High-Performance Osram LEDs „Black Series“
Colour	Yellow 590 nm
Life Span	Long Lifetime and Reliability
Main Radiation Angle	30° Lense
Viewing Angle	> 120°

Display

Resolution	16x18 Pixel + Ring
Pixel Grid	20 mm
Digit Size	30.5 cm
Reading Distance	approx. 150 m
Readability	Unique Contrast due to Special Design
Update Rate	approx. 1 sec, adjustable
Brightness Regulation	Automatically
Bitmap Memory	250 Pictures

Mechanical Data

Dimensions	62 x 62 x 4 cm
Weight	approx. 4 kg
Enclosure	ASA Plastics
Front Plate Sheeting	Highly Reflective, White
Protection Degree	IP67
Front Window	Lexan, Anti-Glare Coating
Ambient Temperature	-25 to 60°C

Scope of Delivery

- Speed Display GR33L
- Control Software BT-Comm
- Pole Brackets (60 or 76mm)
- Power supply Cable 12V
- Optional: Variable Pole Clamps
- Optional: Batteries and Solar Power Supply



© 2013-04 Sierzega Elektronik GmbH. All rights reserved. Specifications included in this datasheet are subject to change without notice.